


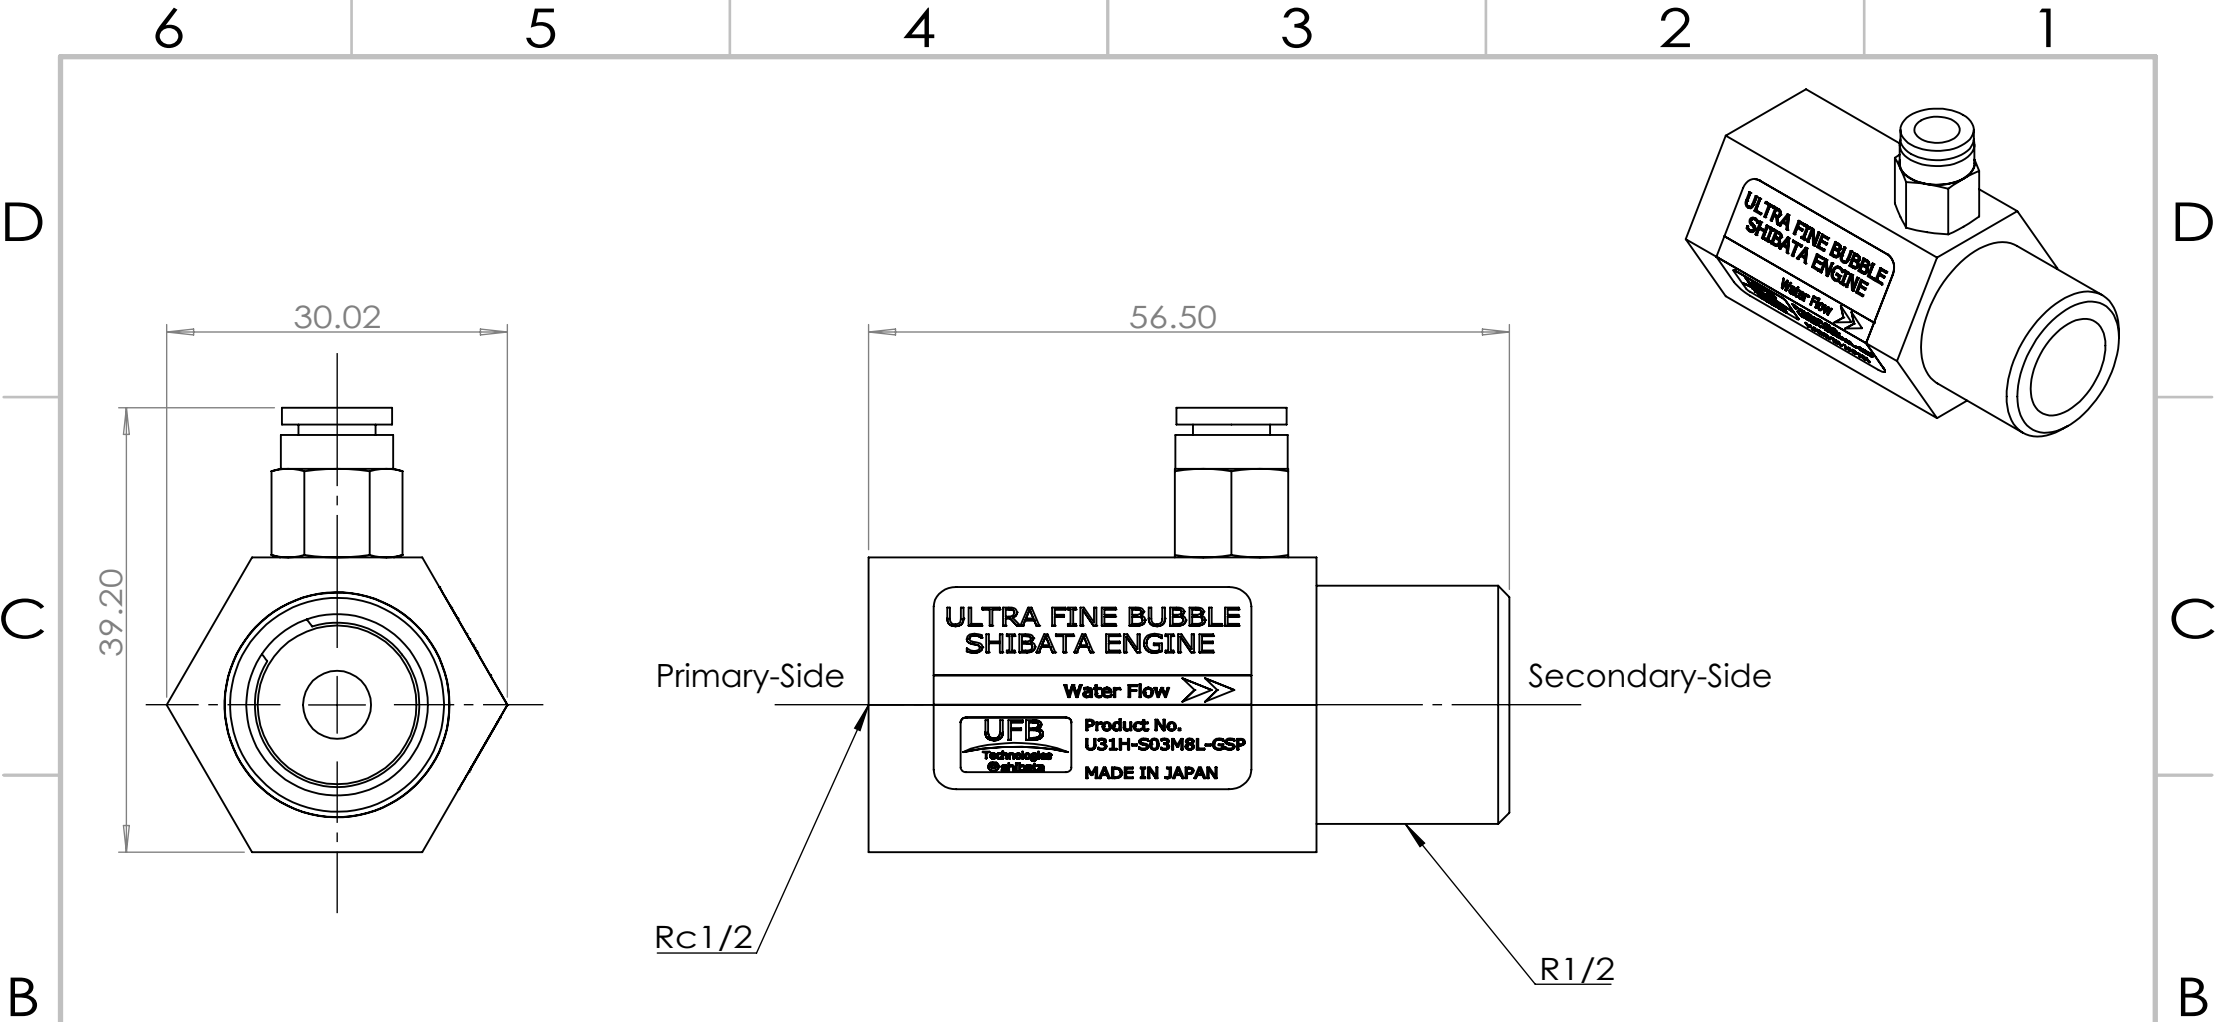

Water pressure (MPa)	Water flow rate (L/min)	Self-priming amount (L/min)	Product number	U31H-S03M8L-GSP	
0.1	4.3	0.7	Usable pressure range	0.1 ~ 0.75MPa	
0.2	6.5	1.4	Recommended pressure range	0.3 ~ 0.75MPa	
0.3	8.0	2.2	Allowable temperature range	0 ~ 55°C (Conditions : no Freezing)	
0.5	10.5	4.7	Weight	Approx.140g	
0.75	12.6	5.0	Connection specifications	Inlet	Rc1/2 (Female thread)
Caution : Flow rate accuracy ±10%. The flow rate varies depending on the usage environment.			Outlet	R1/2 (Male thread)	
			Tube	Outer diameter : 6mm	
			Materials	Casing	SUS316, FKM
				Engine	ABS, POM

Name :			Specification	
Name of Corporation :				
Shibata Co., Ltd.			A4	
Scale : 1.5 : 1		Number of drawings 1 / 1		02